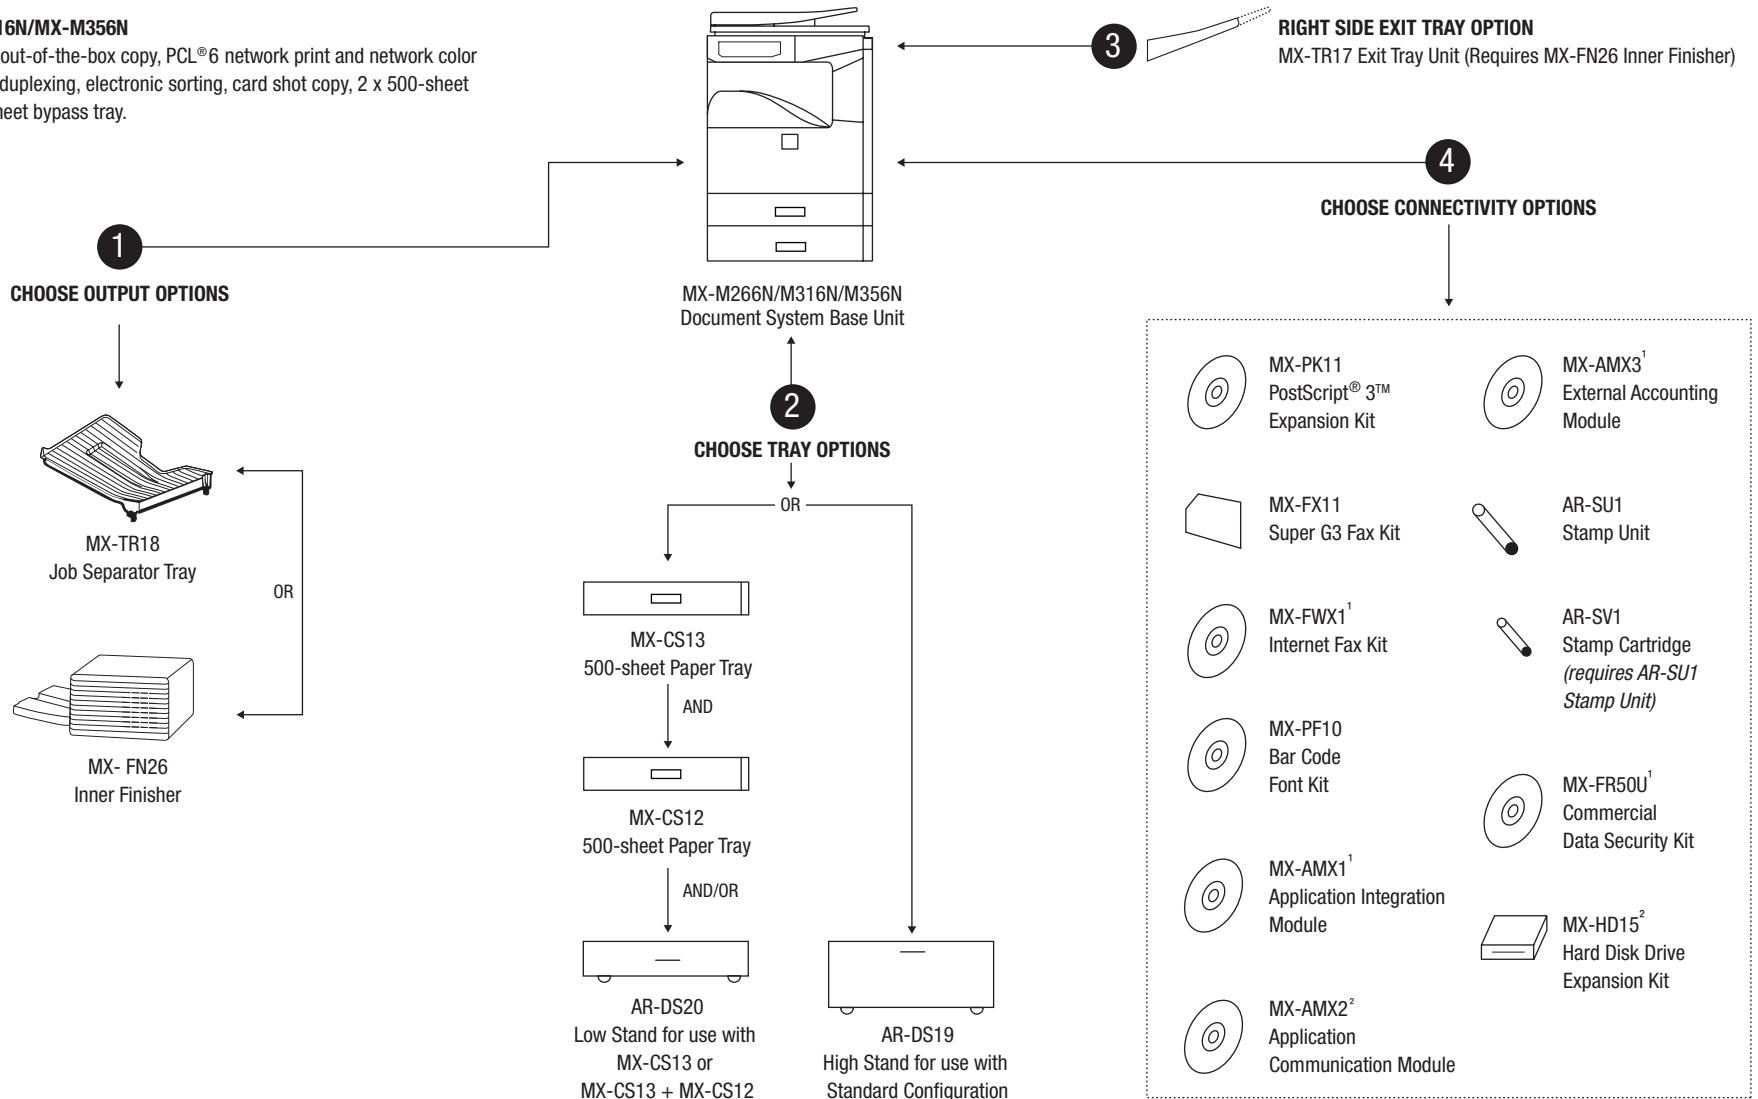# SHARP®

PRODUCT CONFIGURATION

MX-M266N/MX-M316N/MX-M356N
Base model includes out-of-the-box copy, PCL®6 network print and network color scan capability, auto duplexing, electronic sorting, card shot copy, 2 x 500-sheet cassettes and 100-sheet bypass tray.
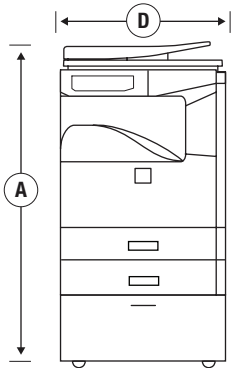
3 **RIGHT SIDE EXIT TRAY OPTION**
MX-TR17 Exit Tray Unit (Requires MX-FN26 Inner Finisher)

4

MX-M266N/M316N/M356N
Document System Base Unit

CHOOSE CONNECTIVITY OPTIONS

1

CHOOSE OUTPUT OPTIONS

MX-PK11
PostScript® 3™
Expansion Kit

MX-AMX3[1]
External Accounting
Module

MX-TR18
Job Separator Tray

OR

MX-FX11
Super G3 Fax Kit

AR-SU1
Stamp Unit

2

CHOOSE TRAY OPTIONS

OR

MX-FWX1[1]
Internet Fax Kit

AR-SV1
Stamp Cartridge
*(requires AR-SU1
Stamp Unit)*

MX- FN26
Inner Finisher

MX-CS13
500-sheet Paper Tray

MX-PF10
Bar Code
Font Kit

AND

MX-FR50U[1]
Commercial
Data Security Kit

MX-CS12
500-sheet Paper Tray

MX-AMX1[1]
Application Integration
Module

AND/OR

MX-HD15[2]
Hard Disk Drive
Expansion Kit

AR-DS20
Low Stand for use with
MX-CS13 or
MX-CS13 + MX-CS12

AR-DS19
High Stand for use with
Standard Configuration

MX-AMX2[2]
Application
Communication Module
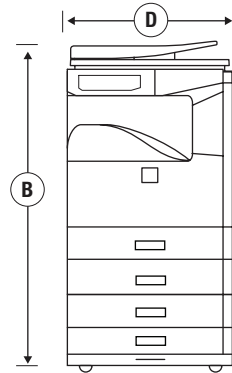
[1] *Requires MX-HD15 Hard Disk Drive Expansion Kit.*
[2] *The following features require the MX-HD15 Hard Disk Drive Expansion Kit: Scan to "My Folder", Direct Printing, Document Filing, Inbound Fax Routing, Network TWAIN, Network Scanner Tool.*

SPACE REQUIREMENTS AND PLANNING GUIDE

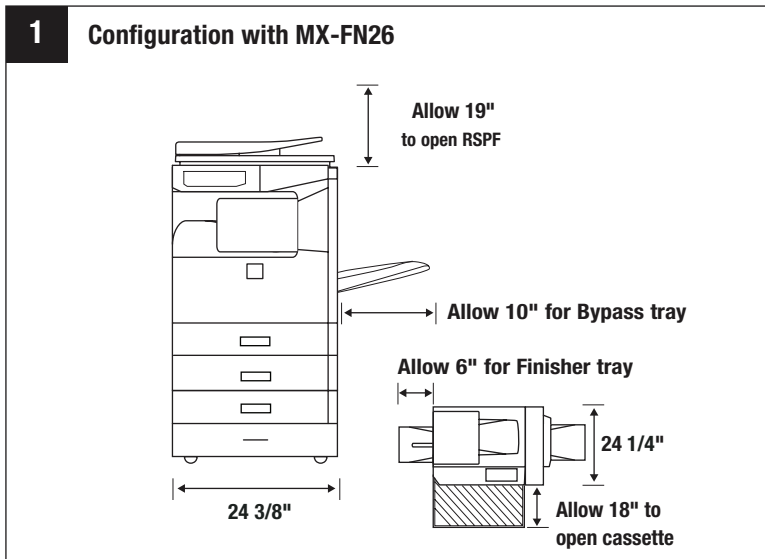**Base Unit + AR-DS19**

Base Unit + MX-CS13 + MX-CS12 + AR-DS20

Base Unit + MX-CS13 + AR-DS20

A	44 1/2"
B	43 1/4"
C	40 5/8"
D	24 3/8"

Allow up to 30" in front for cabinet access.

Approximate Dimensions with Inner Finisher and Doors/Cover Open

1 **Configuration with MX-FN26**

Allow 19" to open RSPF

Allow 10" for Bypass tray

Allow 6" for Finisher tray

24 1/4"

24 3/8"

Allow 18" to open cassette

Plan ahead and make sure your installation is a great success! Remember to check the latest information on these products and make sure that the following items are available prior to installation.

• Verify power dedication and check for power stability. The MX-M266N/M316N/M356N Document Systems require AC 120± 10% VAC, 60 HZ, 15 Amps power source (machines draw 12 Amps).

• Upon setup, confirm that you have the latest firmware available before upgrading to the MX-M266N/M316N/M356N Document Systems.

• Some accessories require a product key for operation. You should obtain the accessory Application Code, machine's serial number and register online prior to arrival.

• Make sure the customer has enough supplies on-hand to complete a large rush job. After-hours printing and/or holiday work may take place immediately following an installation.

• MX-315NT (Toner Cartridge) • MX-312NV (Developer) • MX-312NR (Drum Cartridge)

• Check to see if My Sharp™ online training is set up for the end-user. **mV™ SHARP**

All dimensions listed are approximate. For complete installation procedures please contact your Authorized Sharp servicing dealer.

Design and specifications are subject to change without notice. All product dimensions listed are approximate. Sharp, My Sharp and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or affiliated companies. PCL® is a registered trademark of Hewlett-Packard Company and PostScript® is a registered trademark of Adobe Systems Inc. All other trademarks are the property of their respective owners.